

### Overview

R6/85/22 Grippled Stock Fence – designed in conjunction with the Game and Wildlife Conservation Trust – features solid vertical wires and comes with gripples fitted as standard for ease of installation. The high pressure bonded Torus knot is unobtrusive and does not have any sharp edges. Tornado Torus Stock Fence is manufactured with high tensile wire which strains tighter than mild steel and so requires fewer intermediate posts, making it quicker to erect. It does not stretch with weathering so does not need to be retightened annually.

### Compliance with British and European Standards

BSEN 10218 - Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.

BSEN 10223 - Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.

BSEN 10244 - Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).

### Sustainability

All Tornado products are 100% recyclable.

### Traceability

This fence is batch marked and can be traced back to point of manufacture.

### Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating. Two strands of barbed wire or a single electrified wire can be added to the top of the fence.

### Health and Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

### Suitable for

- Sheep

### Specification


No. of Line Wires	6
Overall Height (cm)	85
Distance between stay wires (cm)	22
Top & bottom line wire specification	2.5mm dia - 1235-1390 N/mm <sup>2</sup>
Intermediate line wire specification	2.5mm dia - 1235-1390 N/mm <sup>2</sup>
Vertical stay wire specification	2.5mm dia - 695-850 N/mm <sup>2</sup>
Average Weight per 100 Metre Roll (kg)	41.04
Material Composition	Heavily galvanised steel wire

### Product Codes

RZSG068501	100 metre roll
------------	----------------

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

### Fence Layout Detail

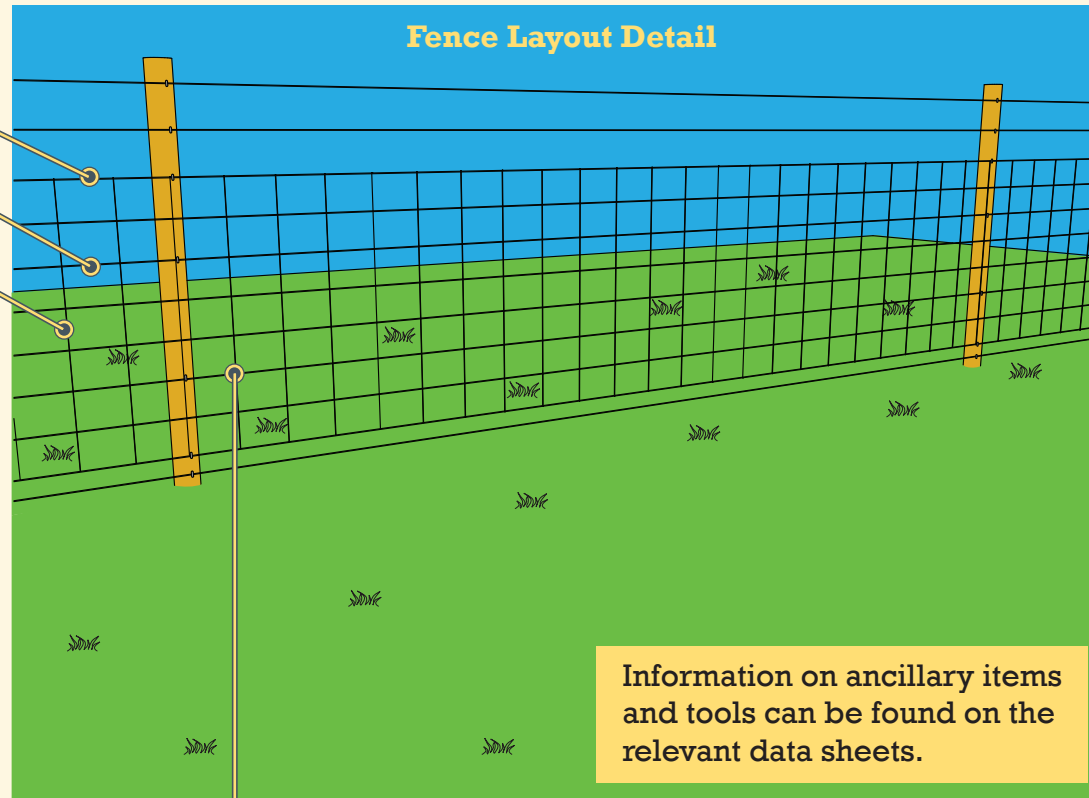


### Line Wire Detail

		200mm
		175mm
		175mm
		150mm
		150mm
	220mm	220mm


Top wire 2.5mm high tensile  
 Intermediate line wire 2.5mm high tensile  
 Vertical stay wire 2.5mm

### Fence Configuration Detail

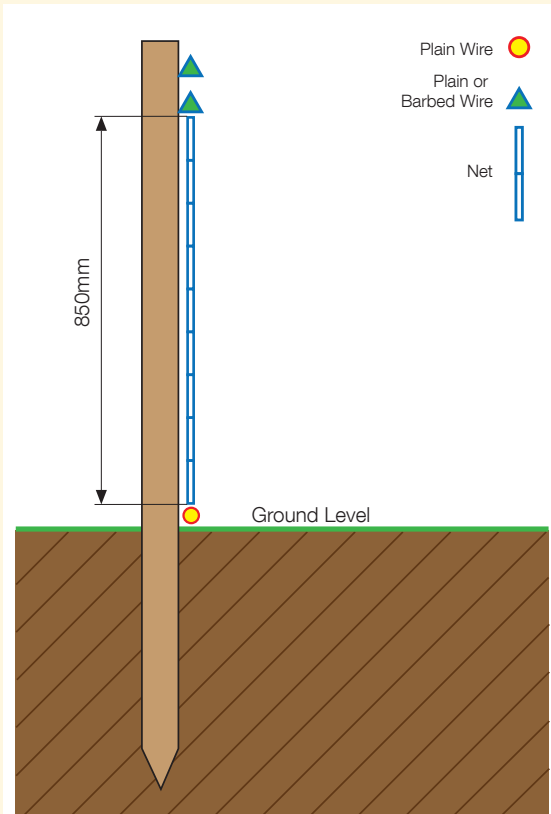

Information on ancillary items and tools can be found on the relevant data sheets.

### Torus Knot



Manufactured with a high pressure bonded, smooth knot and a continuous vertical stay wire. The Tornado Torus offers optimal strength even in the most extreme environments.

### Related Products

- Barbed wire
- Plain wire
- Staples
- Stock-ade staple gun
- Range of fence installation tools